



REV	ECO	DATE	DESCRIPTION	DB
F	606	19-Feb-96	ADDED .8 BEAM EXIT DIM	

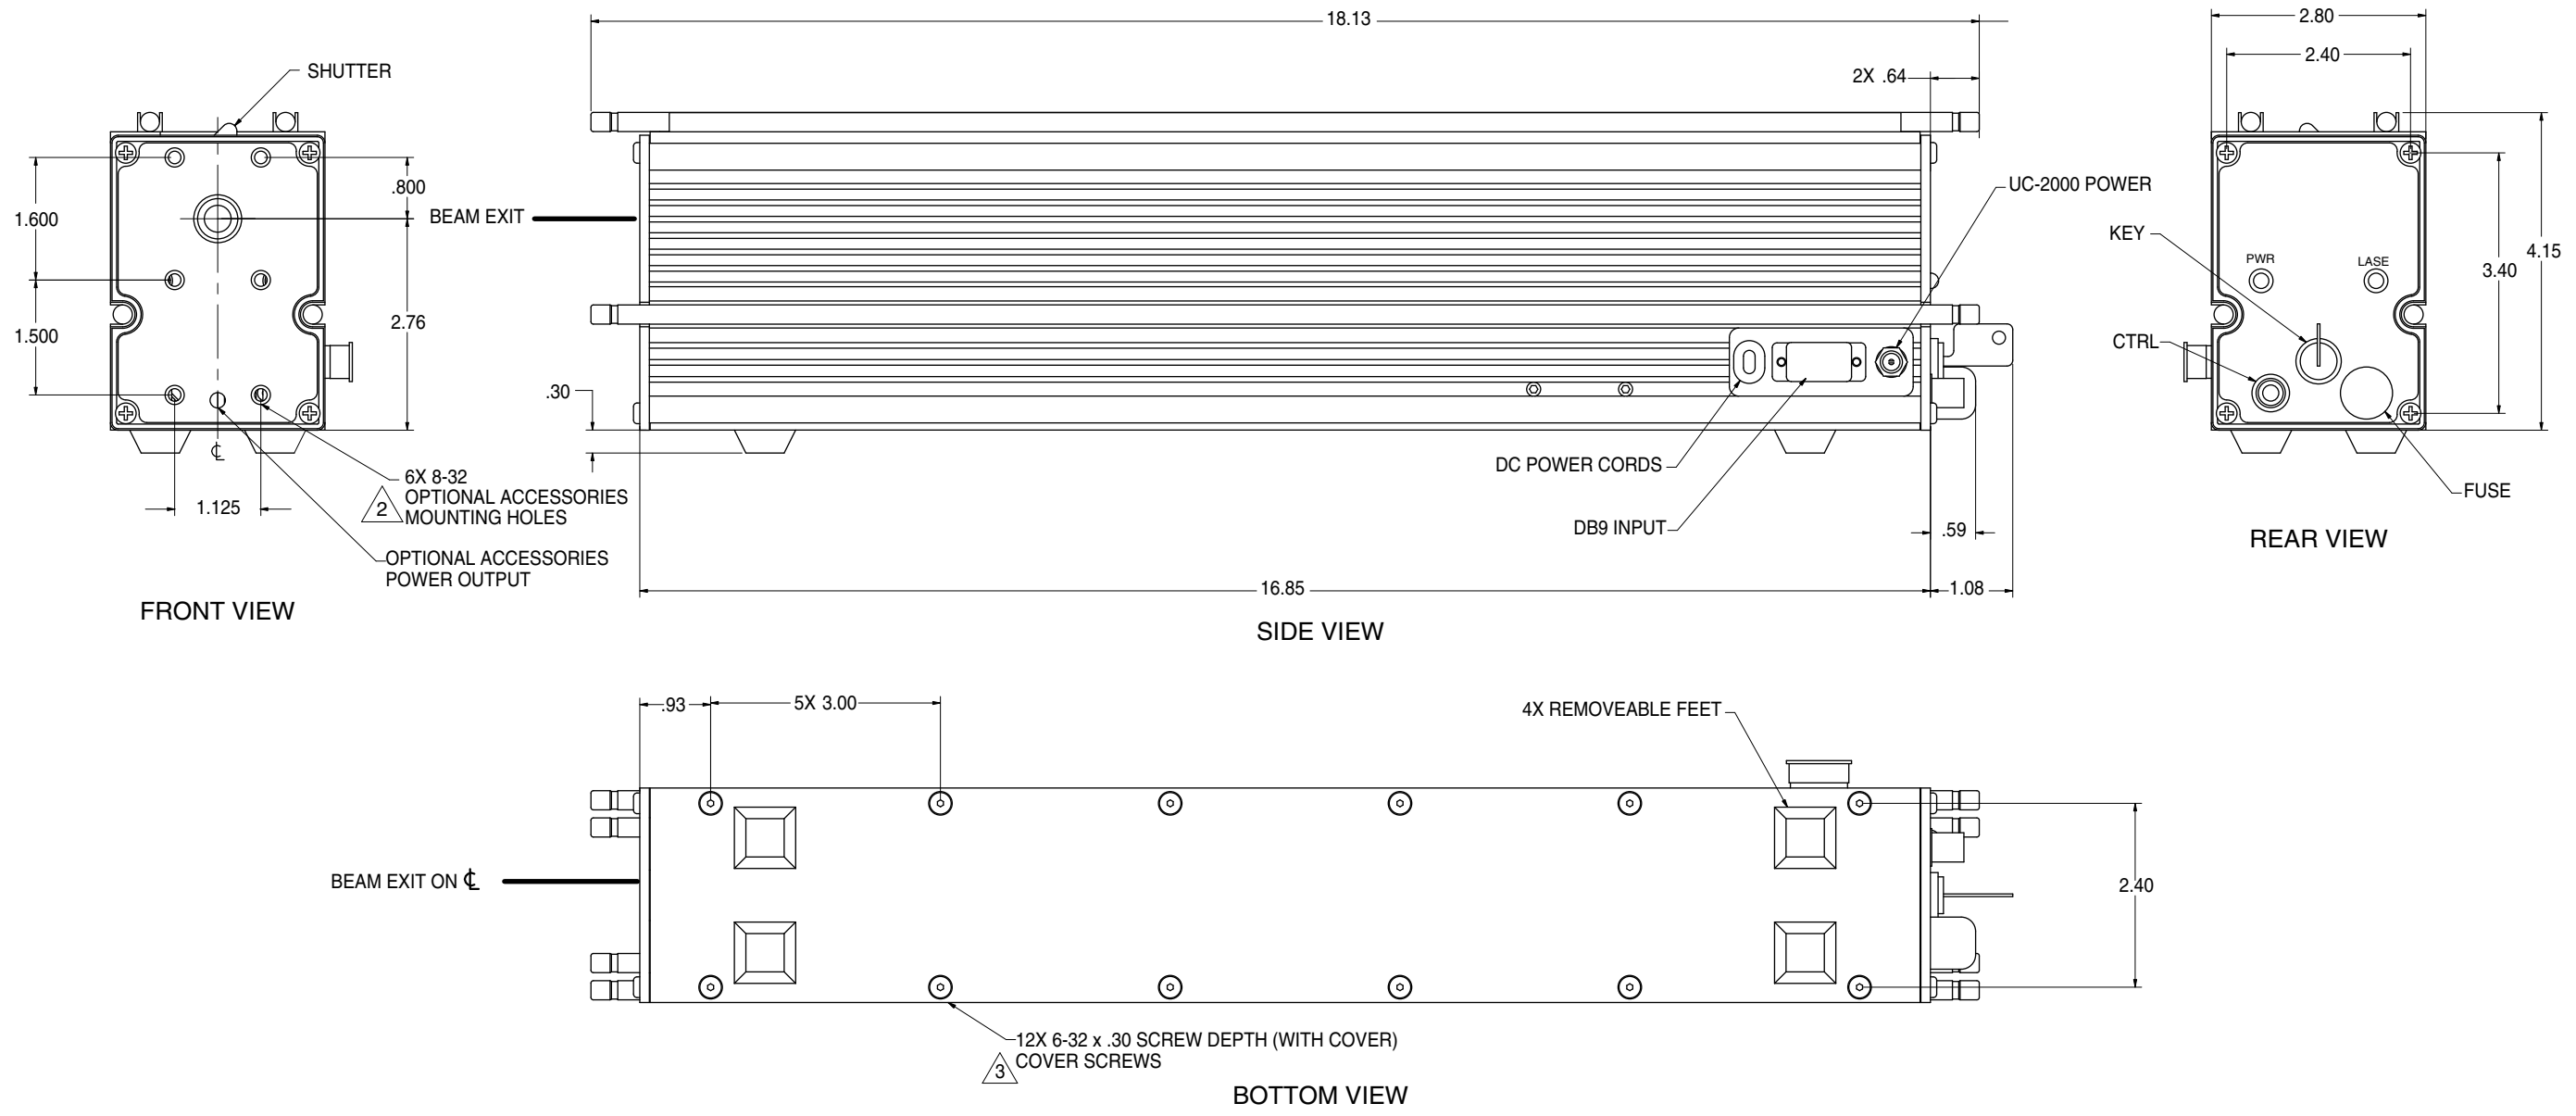

- NOTES:
- DO NOT USE COVER SCREW HOLES TO SUPPORT LASER WEIGHT.
 - DO NOT USE OPTIONAL ACCESSORIES MOUNTING HOLES TO MOUNT LASER.
 - LASER IS MOUNTED BY REMOVING COVER SCREWS AND REPLACING WITH APPROPRIATE LENGTH SCREWS FOR YOUR MOUNTING APPLICATION. USE A MINIMUM OF FOUR SCREWS IN A SYMMETRICAL PATTERN TO PROPERLY DISTRIBUTE MOUNTING FORCES. DO NOT REMOVE COVER.
 - WEIGHT: 9 LBS

Pro/E

TOLERANCES UNLESS NOTED:		PROPRIETARY THIS DRAWING IS PROPRIETARY TO SYNRAD INC. AND SHALL NOT BE USED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF SYNRAD INC.	 SYNRAD INC. 4600 Campus Place Mukilteo, WA 98275 Phone: (425)349-3500 Fax: (425)349-3667
.x = ±0.1	ANGLE = ±1.0°		
.xx = ±0.01			
.xxx = ±0.005			
MATERIAL:		DESCRIPTION: OUTLINE AND MOUNTING, 48-1	
FINISH:		PART NUMBER: 48-1	DWG/FILE NUMBER: 16048
		SHEET 1 OF 1	DB:
		UNITS: INCHES	CATEGORY:
		SIZE: B	FINISH CLASS:
			DRAWN BY:
			CHECKED BY:
			APPROVED BY:
			DATE: 19-Feb-96
			DATE:
			DATE: