
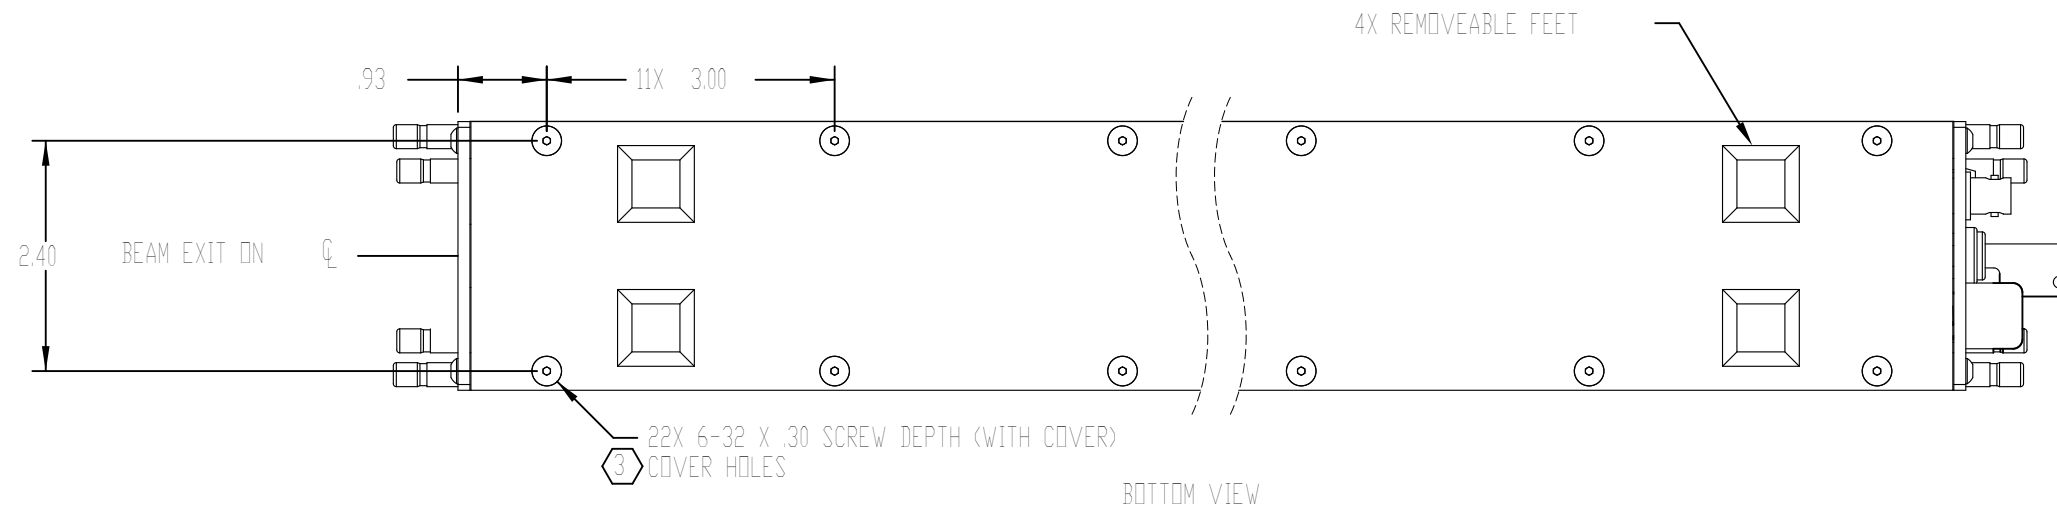
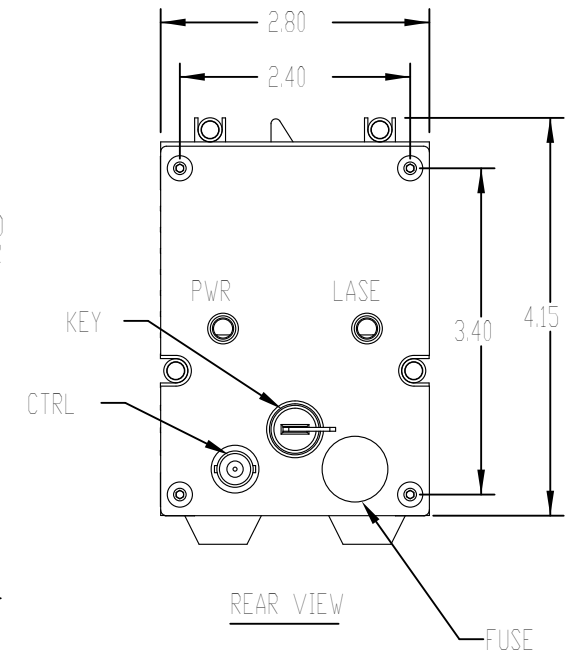
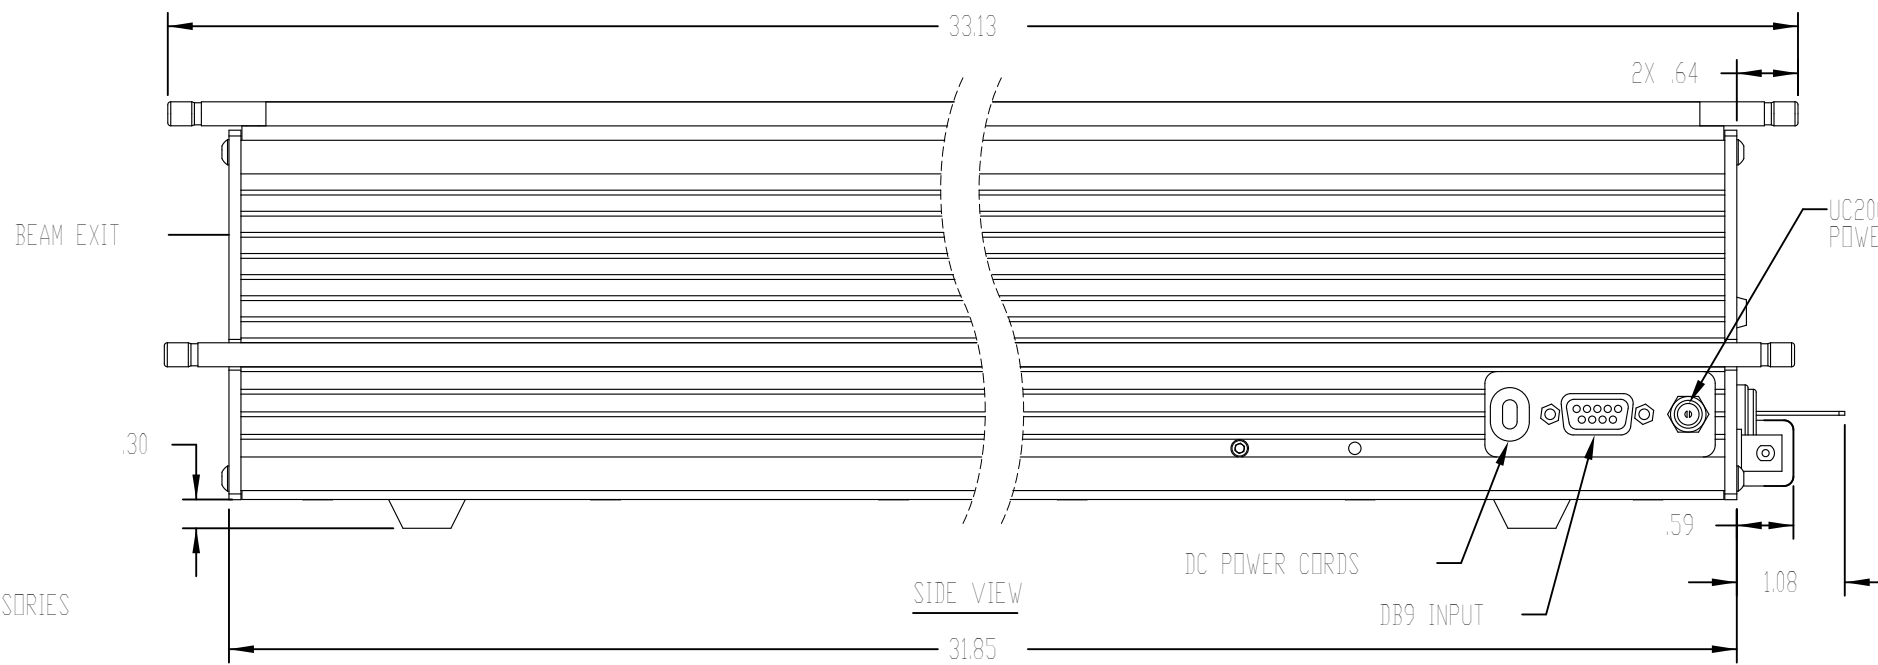



REV	ECO	DATE	DESCRIPTION	DB
E	3912	6-Aug-08	ADD BEAM EXIT Ø, CONVERT TO SOLIDWORKS	DMD
F	4107	8-Sep-09	ADD NOTE 5	DMD

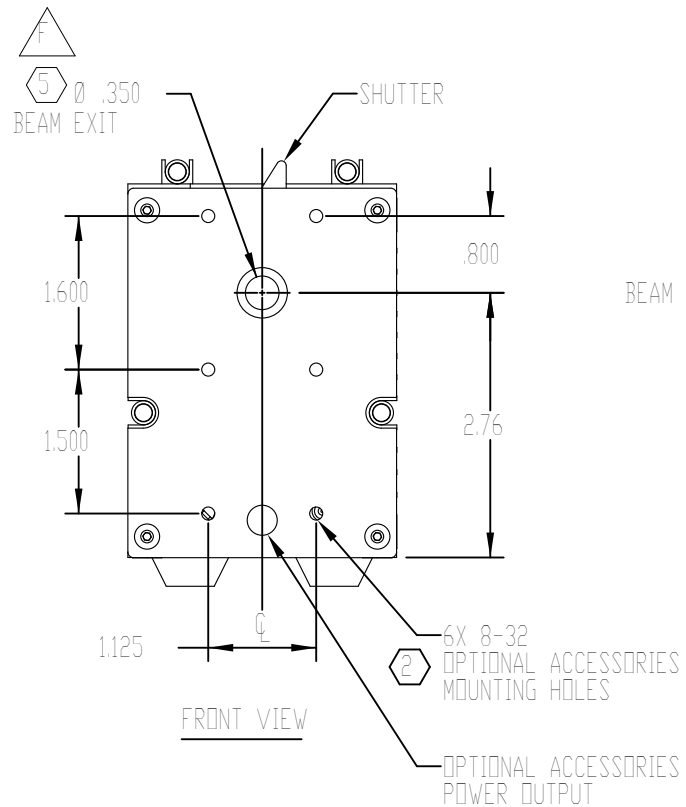

NOTES:

- DO NOT USE COVER SCREW HOLES TO SUPPORT LASER WEIGHT.
- DO NOT USE OPTIONAL ACCESSORIES MOUNTING HOLES TO MOUNT LASER.
- LASER IS MOUNTED BY REMOVING COVER SCREWS AND REPLACING WITH APPROPRIATE LENGTH SCREWS FOR YOUR MOUNTING APPLICATION. USE A MINIMUM OF SIX SCREWS IN A SYMMETRICAL PATTERN TO PROPERLY DISTRIBUTE MOUNTING FORCES. DO NOT REMOVE COVER.
- WEIGHT: 18 LBS.
- BEAM PATH MAY NOT BE CENTERED OR PERPENDICULAR TO FACEPLATE APERTURE.

TOLERANCES UNLESS NOTED:		PROPRIETARY THIS DRAWING IS PROPRIETARY TO SYNRAD INC. AND SHALL NOT BE USED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF SYNRAD INC.	
.x = ± 0.1	ANGLE = ± 1°	 SYNRAD INC. 4600 Campus Place Mukilteo, WA 98275 Phone: (425)349-3500 Fax: (425)349-3667	
.xx = ± 0.01			
.xxx = ± 0.005			
MATERIAL:		DESCRIPTION: OUTLINE & MOUNTING, 48-2	
FINISH:		PART NUMBER: 300-16364-01	DWG/FILE NUMBER: 300-16364-00
		SHEET 1 of 1	ENG: . DRAWN BY: A. Dexter DATE: 16-Feb-96
		UNITS: Inches	CATEGORY: . CHECKED BY: . DATE: .
		SIZE: B	FINISH CLASS: . APPROVED BY: . DATE: .