



REV	ECO	DATE	DESCRIPTION	DB
G	3912	6-Aug-08	ADD BEAM EXIT Ø, CONVERT TO SOLIDWORKS	DMD
H	4107	8-Sep-09	ADD NOTE 5	DMD

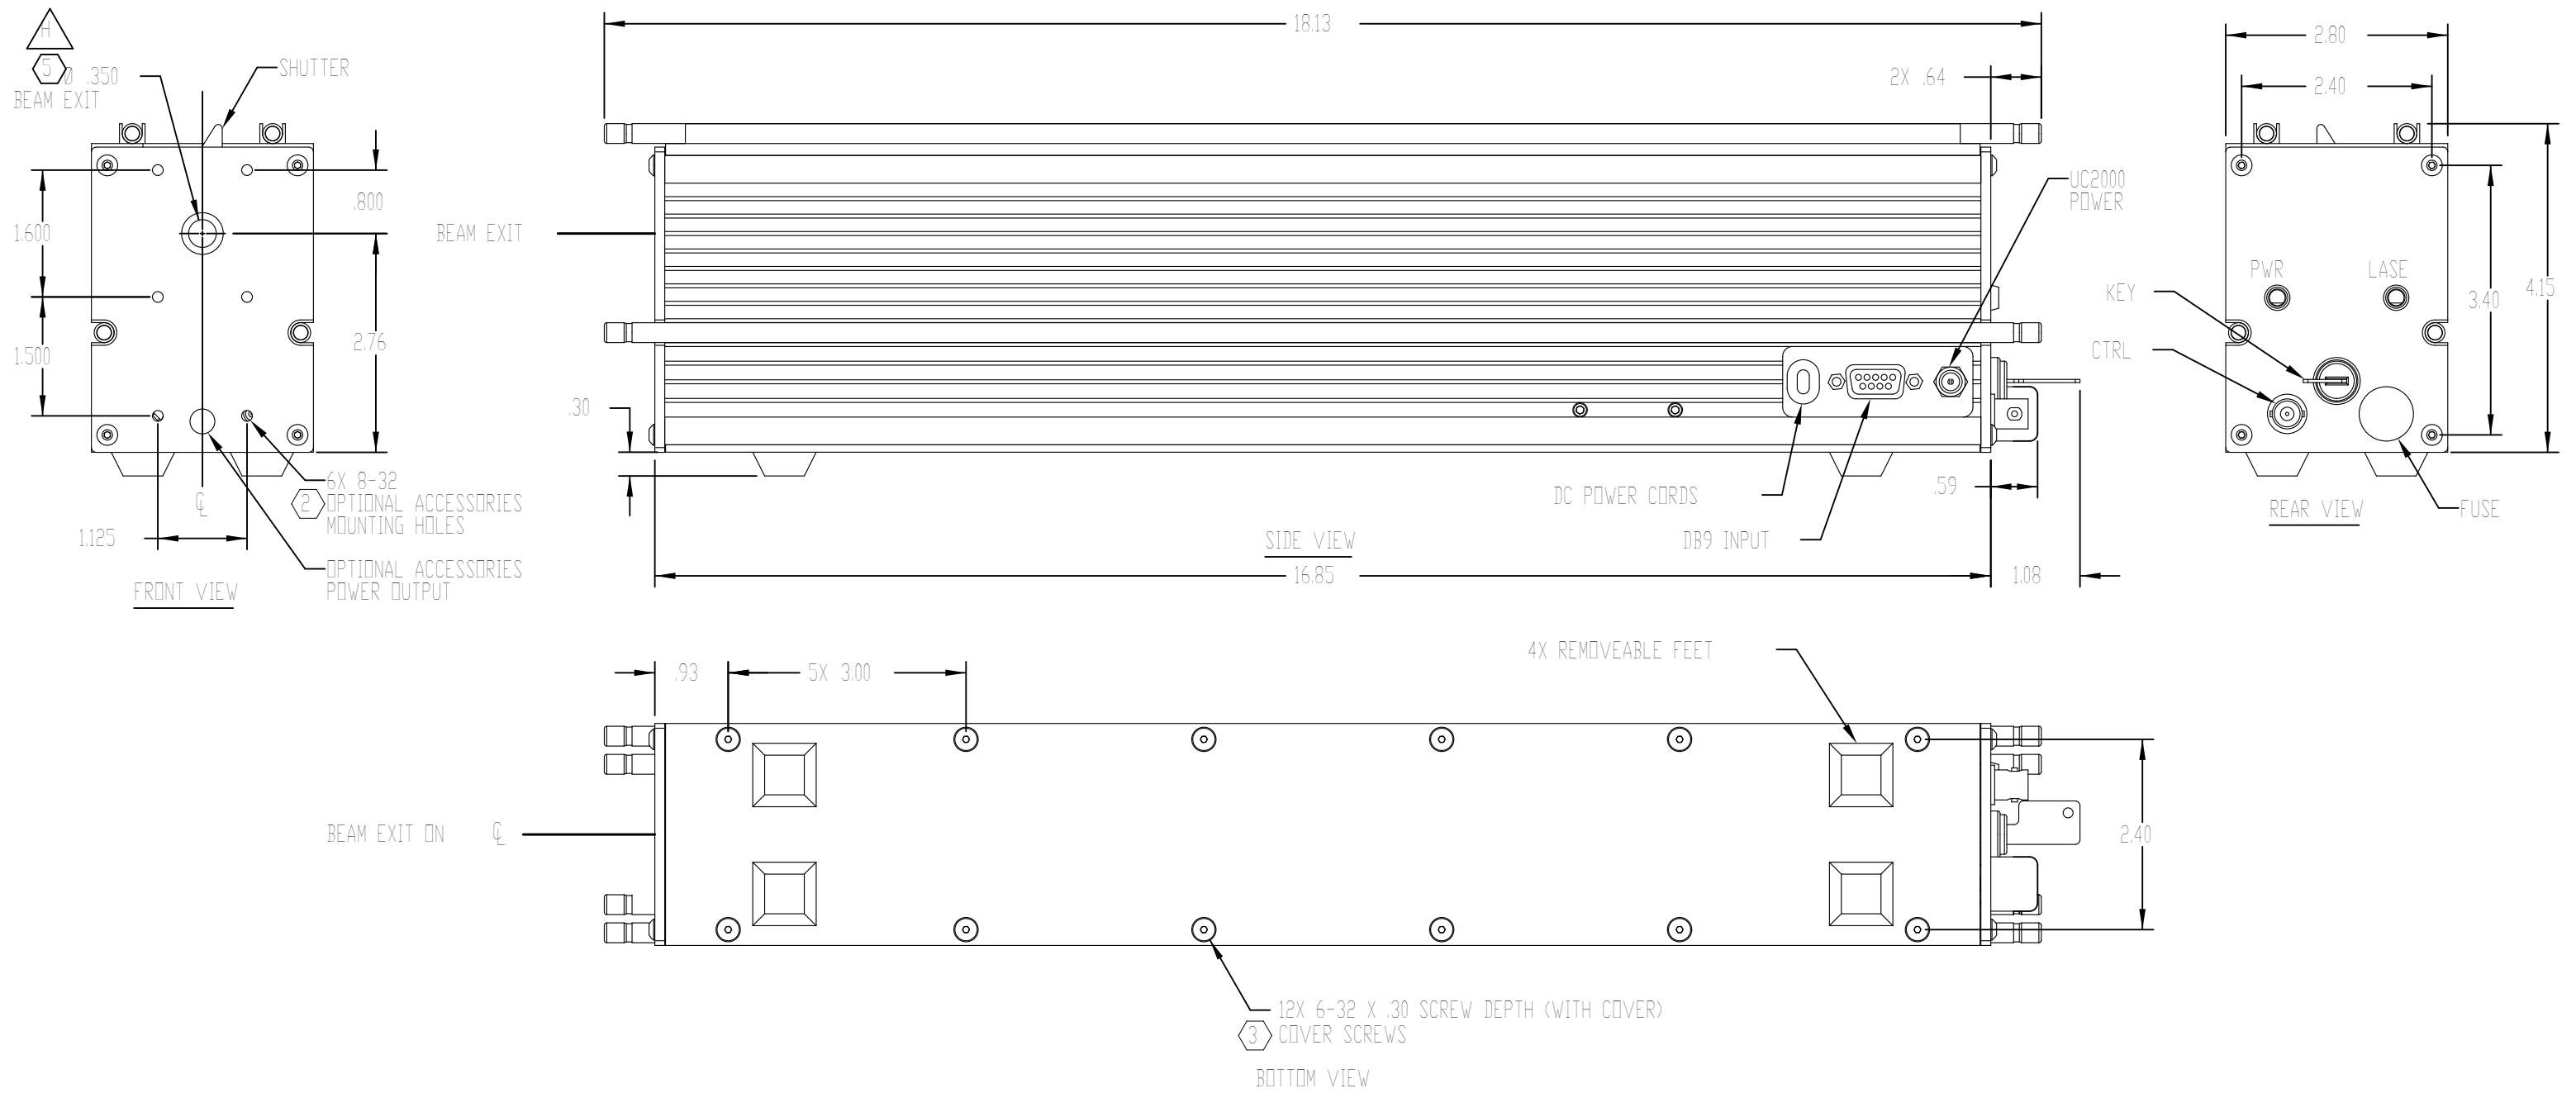

NOTES:

- DO NOT USE COVER SCREW HOLES TO SUPPORT LASER WEIGHT.
- DO NOT USE OPTIONAL ACCESSORIES MOUNTING HOLES TO MOUNT LASER.
- LASER IS MOUNTED BY REMOVING COVER SCREWS AND REPLACING WITH APPROPRIATE LENGTH SCREWS FOR YOUR MOUNTING APPLICATION. USE A MINIMUM OF FOUR SCREWS IN A SYMMETRICAL PATTERN TO PROPERLY DISTRIBUTE MOUNTING FORCES. DO NOT REMOVE COVER.
- WEIGHT: 9 LBS.
- BEAM PATH MAY NOT BE CENTERED OR PERPENDICULAR TO FACEPLATE APERTURE.

TOLERANCES UNLESS NOTED:		PROPRIETARY THIS DRAWING IS PROPRIETARY TO SYNRAD INC. AND SHALL NOT BE USED OR DISCLOSED IN WHOLE OR IN PART WITHOUT WRITTEN PERMISSION OF SYNRAD INC.		 SYNRAD INC. 4600 Campus Place Mukilteo, WA 98275 Phone: (425)349-3500 Fax: (425)349-3667	
.x = ± 0.1 ANGLE = ± 1°					
.xx = ± 0.01					
.xxx = ± 0.005		DESCRIPTION: OUTLINE & MOUNTING, 48-1			
MATERIAL:		PART NUMBER: 300-16048-01		DWG/FILE NUMBER: 300-16048-00	
FINISH:		SHEET 1 of 1		DRAWN BY: A. Dexter	
		UNITS: Inches		DATE: 19-Feb-96	
		SIZE: B		CHECKED BY:	
		FINISH CLASS:		APPROVED BY:	
				DATE:	